



**SR Series**  
**SR-1000**  
**Cinema Surround**  
**Loudspeaker**

**Features**

- High Performance for all Cinema applications
- 10" (254 mm) woofer
- 1" (25 mm) compression driver
- Pre-installed speaker-side QM mounting hardware
- Accepts YM-300 yoke bracket



**Introduction**

The SR-1000 Cinema Surround Loudspeaker is a two-way design that features a 10" (254mm) low-frequency transducer with a 1" (25mm) compression driver. The 150 watt continuous power rating and sophisticated crossover circuitry provides absolute reliability.

The SR-1000 is designed for safe and secure mounting. The cabinet is constructed of 12mm MDF with internal bracing for superior structural integrity. The rear panel of the cabinet is fitted with four threaded insert mounting points that

accommodate the standard bolt pattern for most third-party bracket manufacturers. Included pre-installed speaker side hardware allows fast single-installer wall mounting, and brackets support down-angles of either 15° (QM-SW, ordered separately) or 23° (QM-BW, ordered separately). A traditional U-bracket "yoke" style bracket (YM-300) is also available.

The compact black enclosure with black grille blends into any theatre decor.

**SR-1000**

**Specifications**

System Details		Enclosure Details	
Rated Coverage Angle (-6 dB)	90° conical	Input Connector	Two 5-way binding posts, accepts up to #10 AWG stranded wire
Frequency Range <sup>1</sup> (-10 dB)	64 Hz to 20 kHz	Enclosure Material	12mm MDF with black vinyl wrap, matte finish
Rated Noise Power <sup>2</sup>	150 W	Dimensions (HxWxD)	19.5 x 11.7 x 11.5 inches / 495 x 298 x 291 mm
Sensitivity <sup>3</sup>	94 dB	Net Weight	19.8 lb / 9 kg
Maximum Continuous SPL <sup>4</sup>	116 dB	Brackets	QM-SW, QM-BW, YM-300
Maximum Peak SPL <sup>4</sup>	122 dB		
Rated Impedance	8 ohms nominal		
Maximum Recommended Amplifier Power	500 W		
Transducer	10" (254 mm) LF driver 1" (25 mm) HF compression driver		

As part of QSC's ongoing commitment to product development, specifications are subject to change without notice.

<sup>1</sup> Free-field, -10 dB from on-axis sensitivity


<sup>2</sup> AES2-1984 noise signal for 2 Hrs

<sup>3</sup> On-Axis, free-field sensitivity, 1W, 1 m

<sup>4</sup> Calculated from rated noise voltage and sensitivity



# SR-1000 Diagrams

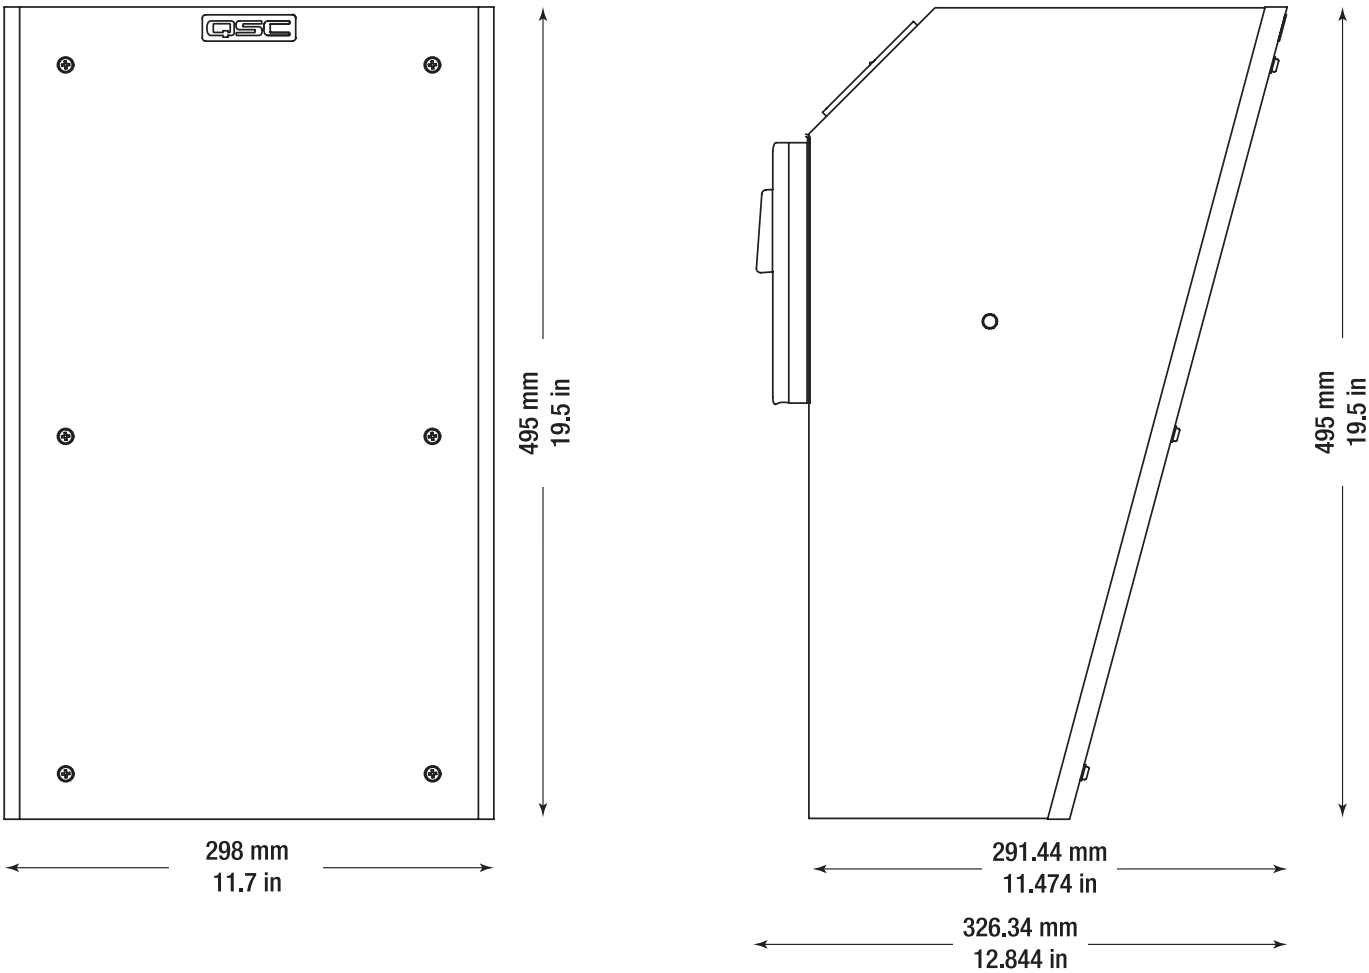

1675 MacArthur Boulevard • Costa Mesa, CA 92626 • Ph: +1.800.854.4079 or +1.714.957.7100 • Fax: +1.714.754.6174

©2018 QSC, LLC all rights reserved. QSC, Q-SYS and the QSC logo are registered trademarks in the U.S. Patent and Trademark Office and other countries. All other trademarks are the property of their respective owners. Patents may apply or be pending.

SR-1000 Spec Sheet 12/03/2018



**SOUND ASSOCIATES**  
PROJECTION | SOUND | CINEMA | DIGITAL

